




ALPS66D30-TP

540-560W

High Performance
N-type Dual Glass Bifacial Solar Module

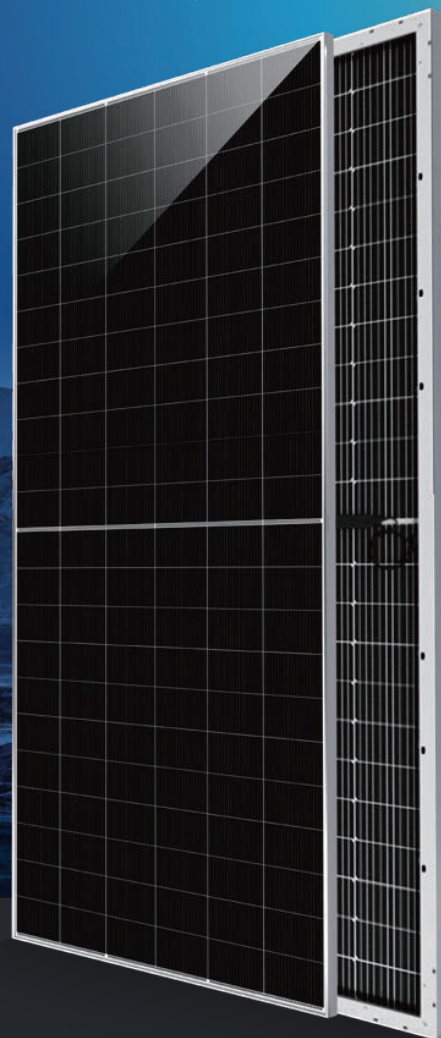

30 LINEARITY POWER
AND
YEAR OUTPUT WARRANTY

25 EXCELLENT PRODUCTS
MATERIAL AND
YEAR PROCESS WARRANTY

KEY FEATURES



Reliable Quality

Manufactured with consistent quality and advanced technology across our global production facilities.



Exceptional Efficiency

Delivers superior energy yield even in low-light or high-temperature conditions.



Tested for Extreme Conditions

Certified under IEC 61215 and withstand 45 mm hail impact demonstrating reliability and strength.



N-Type with Low LID

Advanced N-type cells minimize Light-Induced Degradation (LID) for performance stability.




Industry-Leading Warranty

30-year performance and 25-year product coverage surpass industry norms.

ALPS N-TYPE MODULE PERFORMANCE WARRANTY

RELATIVE POWER(%)

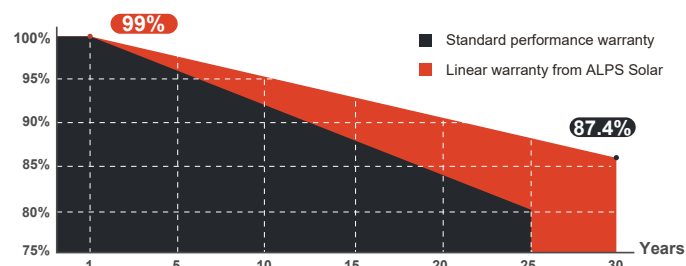

COMPREHENSIVE CERTIFICATES



IEC 61215, IEC 61730, UL 61730, UL 61215

IEC 62716 (Ammonia Corrosion)

IEC 61701 (Salt Mist Corrosion)

IEC 60068 (Sand and Dust)

IEC 62804 (PID Resistance)

IEC 62759 (Transportation Testing)

IEC 62941 (Quality System for PV Module Manufacturing)

LID, LeTID, DH 2000, TC 400, HF 30, UV 60


Wind Test

Hail Impact Test (45mm / 55mm)




Registro ENEA

ENGINEERING DRAWINGS

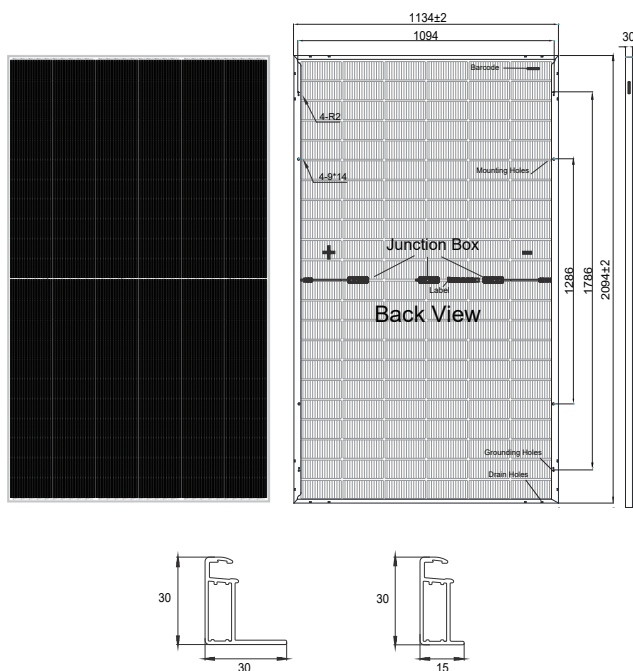

I-V CURVES

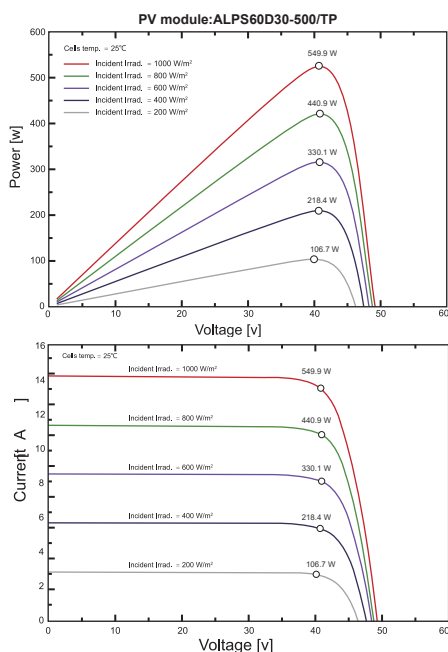

PACKING CONFIGURATION

Pieces per pallet	36 pcs
Pallet Dimension	2120 x 1135 x 1255 mm
Weight of packing	1060 kg / 2336.9 lb
Pieces per container	720 pcs
Size of container	40'HQ

ELECTRICAL CHARACTERISTICS (STC)

Power Level	540	545	550	555	560
Pmax (W)	540	545	550	555	560
Vmp (V)	40.45	40.65	40.85	41.05	41.25
Imp (A)	13.35	13.41	13.46	13.52	13.58
Voc (V)	49.30	49.50	49.70	49.90	50.10
Isc (A)	14.06	14.12	14.18	14.24	14.30
Module Efficiency (%)	22.74	22.95	23.16	23.37	23.58
Power Tolerance (W)	0~+3%				
Temperature Coefficient Pmax (%/°C)	-0.29				
Temperature Coefficient Isc (%/°C)	0.004				
Temperature Coefficient Voc (%/°C)	-0.25				

STC:Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5

BIFACIAL OUTPUT-BACKSIDE POWER GAIN

5%	Power Output (W)	567	572	578	583	588
	Module Efficiency (%)	23.88	24.10	24.32	24.54	24.76
10%	Power Output (W)	594	600	605	611	616
	Module Efficiency (%)	25.01	25.25	25.48	25.71	25.94
20%	Power Output (W)	648	654	660	666	672
	Module Efficiency (%)	27.29	27.54	27.79	28.05	28.30

WORKING CHARACTERISTICS (BNPI)

Pmax (W)	598	604	609	615	620
Vmp (V)	40.55	40.75	40.95	41.15	41.35
Imp (A)	14.76	14.82	14.88	14.94	15.01
Voc (V)	49.40	49.60	49.80	50.00	50.20
Isc (A)	15.56	15.62	15.68	15.74	15.80

BNPI: Front Irradiance 1000 W/m², Rear 135 W/m², Cell Temperature 25°C, AM=1.5

WORKING PARAMETERS

Maximum System Voltage	1500V DC (IEC)
Operational Temperature	-40~+85 °C
Maximum Series Fuse Rating	30 A
Maximum Static Load, Front	5400 Pa
Maximum Static Load, Back	3750 Pa
NOCT	45±2 °C
Safety Class	Class A

MECHANICAL CHARACTERISTICS

Solar Cells	182 N-type
Number of Cells	132 pcs (6x22)
Module Dimensions	2094 x 1134 x 30 mm
Weight	28 kg / 61.7 lb
Cable Cross Section Size	4 mm² (IEC), 12 AWG (UL)
Junction box	IP68, 3 diodes
Connectors	Stäubli EVO2
Output Cable	(+) 300 mm / (-) 200 mm
Front Glass / Back Glass	2.0 mm / 2.0 mm

MAXIMUM RATINGS

Operating Temperature	-40~85 °C
Operating Humidity	5~85 %RH
Hail Impact Resistance	Withstands 45 mm hail at 31 m/s

Revised in July 2025 1st Edition*

CAUTION:All rights and explain reserved by Alps Solar Energy Inc.
Specifications included in this datasheet are subject to change without notice.
The specific content of the product warranty refers to Alps's latest warranty.